




## Party and Exhibition Hall

Type: 16,3/400

Model: 246

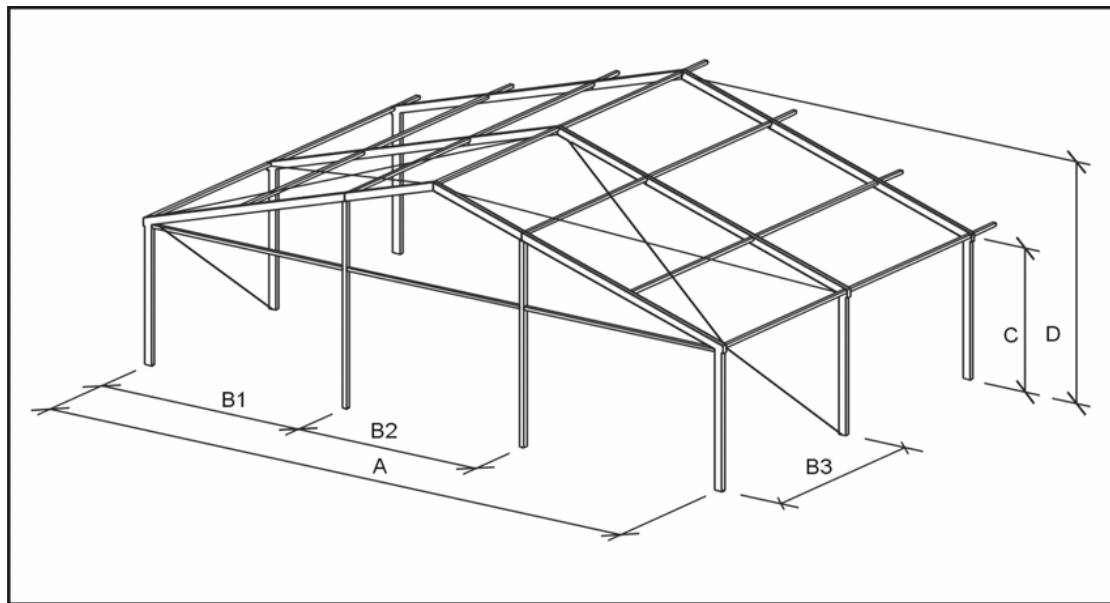

### System Measures

Width (A)	16.08m
Eave height (C)	3.84m
Ridge height (D)	6.45m
Gable truss (B1)	5.54m
Gable truss (B2)	5.00m
Truss distance (B3)	5.00m
Roof slope	18.00 Grad
Longest component	8.61m
Truss profile	200 x 120mm
Ridge and eave purlin	100 x 80 mm
Intermediate purlin	60 x 60 mm
Frame and PVC-fabrics	5.00 kg/sqm

### Technical Description

#### Aluminium Profiles

Solid, hard pressed  
4-groove aluminium hollow profile

#### Steel Parts

Hot-dip galvanized according to DIN EN  
ISO 1461

#### Ground Anchoring

Ground stakes or weight anchoring upon  
request

### Load Requirements/Technical Data

Wind load 0,50 kN/sqm  
Wind speed 100,00 km/h  
Minimum assembly length 10,00 m  
Maximum assembly length unlimited in  
5m increments

